



METAL ROOFING PANELS

LOW RIB PANEL

▶ DESCRIPTIONS

- Versatile, durable, and cost effective.
- The go-to standard for residential and agricultural projects.
- Trapezoidal $\frac{3}{4}$ " tall ribs spaced at 9" on center give this panel a pleasing look and strength to protect from the elements.

▶ SPECIFICATIONS

Installation

- Over solid decking, existing roofing, or an open span of 24" on-center

Material Thickness

- 29 gauge or 26 gauge steel

Substrate

- Galvalume AZ-50 Sherwin Williams painted colors
- Galvalume AZ-55 acrylic coated unpainted mill finish

Coverage

- 36 inch overall coverage

Recommended Slope

- 3/12 Pitch or above

Colors



- 24 SMP painted colors and unpainted mill finish

Warranty

- 40 year warranty for Sherwin Williams painted colors
- 25 year warranty for unpainted mill finish Galvalume

Testing and Approvals

- ASTM E 108-Fire Tests
- UL 580 and UL 1897-Uplift Resistance
- UL 2218-Class 4 Impact Resistance
- FL32188-Florida Approval Non-HVHZ

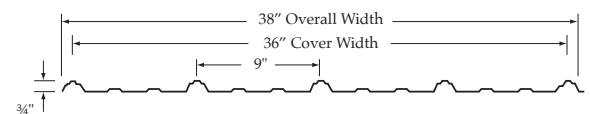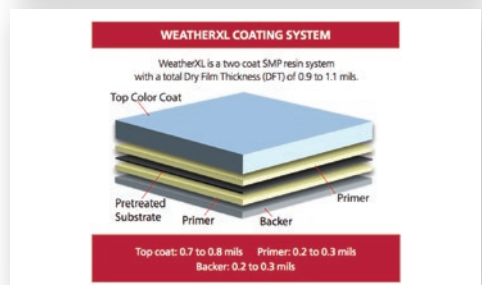

Low Rib
(29 or 26 Gauge)

